


Secure Existing Brick and
Stone Veneers Safely,
Efficiently Without
Exposed Hardware


AGAIN! ANOTHER
CTP SOLUTION!

CTP GRIP-TIE

We help you get a grip on your
façade problems quick and easy!

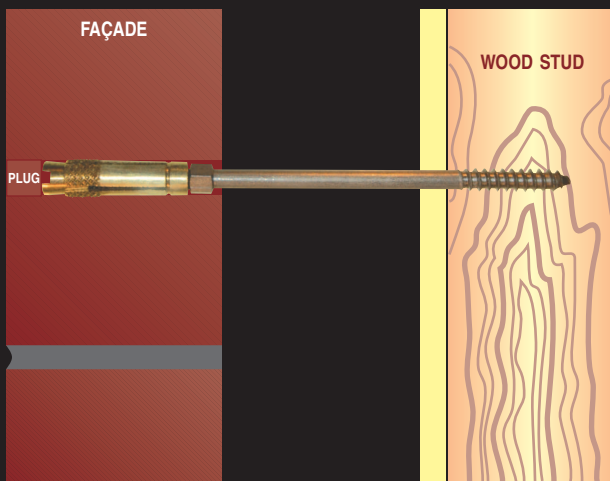

*Usage Shown Here Re-Anchoring
Brick Façade to Typical Wood
or Metal Stud Back-Up*

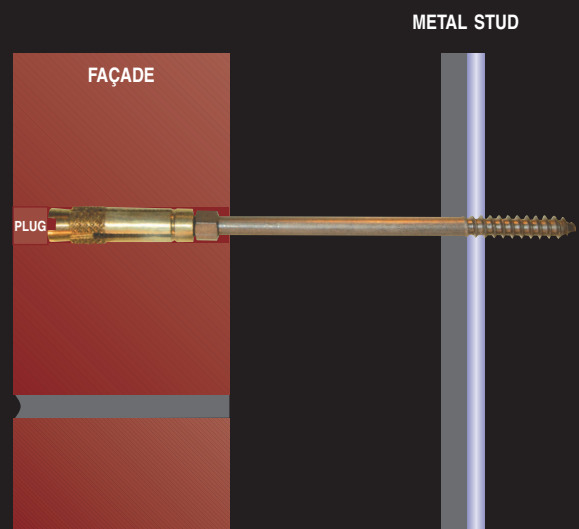

Re-Attach Existing Brick Veneers with Certainty and Security

- Add high strength mechanical anchors to an existing brick facade to fortify and stabilize against external forces
- No exposed hardware
- Delivers 100% performance expectations due to its positive torque gripping activation
- No chemicals or disturbing hammering activity
- An excellent solution to re-anchor a masonry or stone façade to metal or wood stud, structural steel, tile, block, concrete, and brick

Mechanical Repair Anchors for Stabilizing Veneers



Construction Tie Products, Inc. is committed to supplying the highest quality masonry tie and construction systems in North America and satisfying all stringent national codes and standards for today's building structures. CTP, Inc. promises to be a reliable product source along with on-time business integrity for all demanding builders. Call anytime for technical assistance or recommendations.

CTP Grip-Tie Mechanical Repair Anchors for Stabilizing Existing Façades

Product Line Description

Typically, masonry façades are intended to resist wind loads. In lieu of tear down or replacement, an existing masonry or terra cotta façade can be fortified by the addition of mechanical ties or anchors. The **CTP Grip-Tie** anchors provide additional façade stability which may be needed to fulfill a myriad of requirements. The **CTP Grip-Tie** selection process evolves by evaluating the type of anchors one can use to satisfy the repair (compatibility) and strengthening criteria. Also, one cannot ignore the means and methods of installation which can also influence the remedial anchor choice.

Post installed **CTP Grip-Tie** repair anchors are available to accomplish the task. When dealing with a repair situation, the as built material quality and current building conditions are often unknown. It is therefore not uncommon that installation criteria and performance qualification be obtained via field tests in order to confirm design assumptions. The **CTP Grip-Tie** mechanical repair anchors consist of a dual expansion anchor for a mechanical connection that grips the back-up and veneer which is then bridged with an anchor rod. The **CTP Grip-Tie** anchor creates formidable gripping strength to the base material to which it is attached. The anchor does not draw walls together, thereby eliminating additional tension stresses between wythes of material. The back-up material can be concrete, metal stud, wood stud, CMU (hollow or grouted), structural steel, or brick. The veneer can be brick, stone, or precast. The **CTP Grip-Tie** anchor assembly is manufactured from corrosion resistant materials which will contribute to the façade's long term durability and design life. The **CTP Grip-Tie** anchorage system has been designed to accommodate easy installation via hand tools or power tools. Combining the strength, generous spacing, and affordable installation technique, the **CTP Grip-Tie** mechanical repair anchor product line is a value reward choice for façade re-anchoring.

The following application descriptions will provide a quick CTP Grip-Tie Repair Anchor Guideline when determining the appropriate series tie for veneers greater than 3" thick:

- The **solid back-up** conditions – refer to the **CTP 5000** or **CTP 5000R Series Anchors**
- The **hollow back-up** conditions – refer to the **CTP 5100 Series Anchors**
- The **structural steel back-up** conditions – refer to the **CTP 5200 Series Anchors**
- The **stud (wood or steel) back-up** conditions – refer to the **CTP 5300 Series Anchors**


It is recommended to first check with local building codes for spacing condition requirements for proper masonry tie spacing. Typically, the **CTP Grip-Tie** is spaced at one tie per four square feet of veneer for masonry or concrete back-up conditions. For metal or wood stud back-up, a 16" horizontal by 24" vertical is common spacing. Consult with local design professionals to establish wind load criteria for all scenarios.

Each construction site is unique and the appropriate use of this product is the responsibility of the engineers, architects, and other professionals who are familiar with the specific requirements of the project. The data reflects results of lab, field and in-house tests and are provided as a guideline for the designer. Site testing is encouraged for verification of load capacity.




www.ctpanchors.com
Phone: (219) 878-1427
Fax: (219) 874-3626

The CTP Grip-Tie Advantage

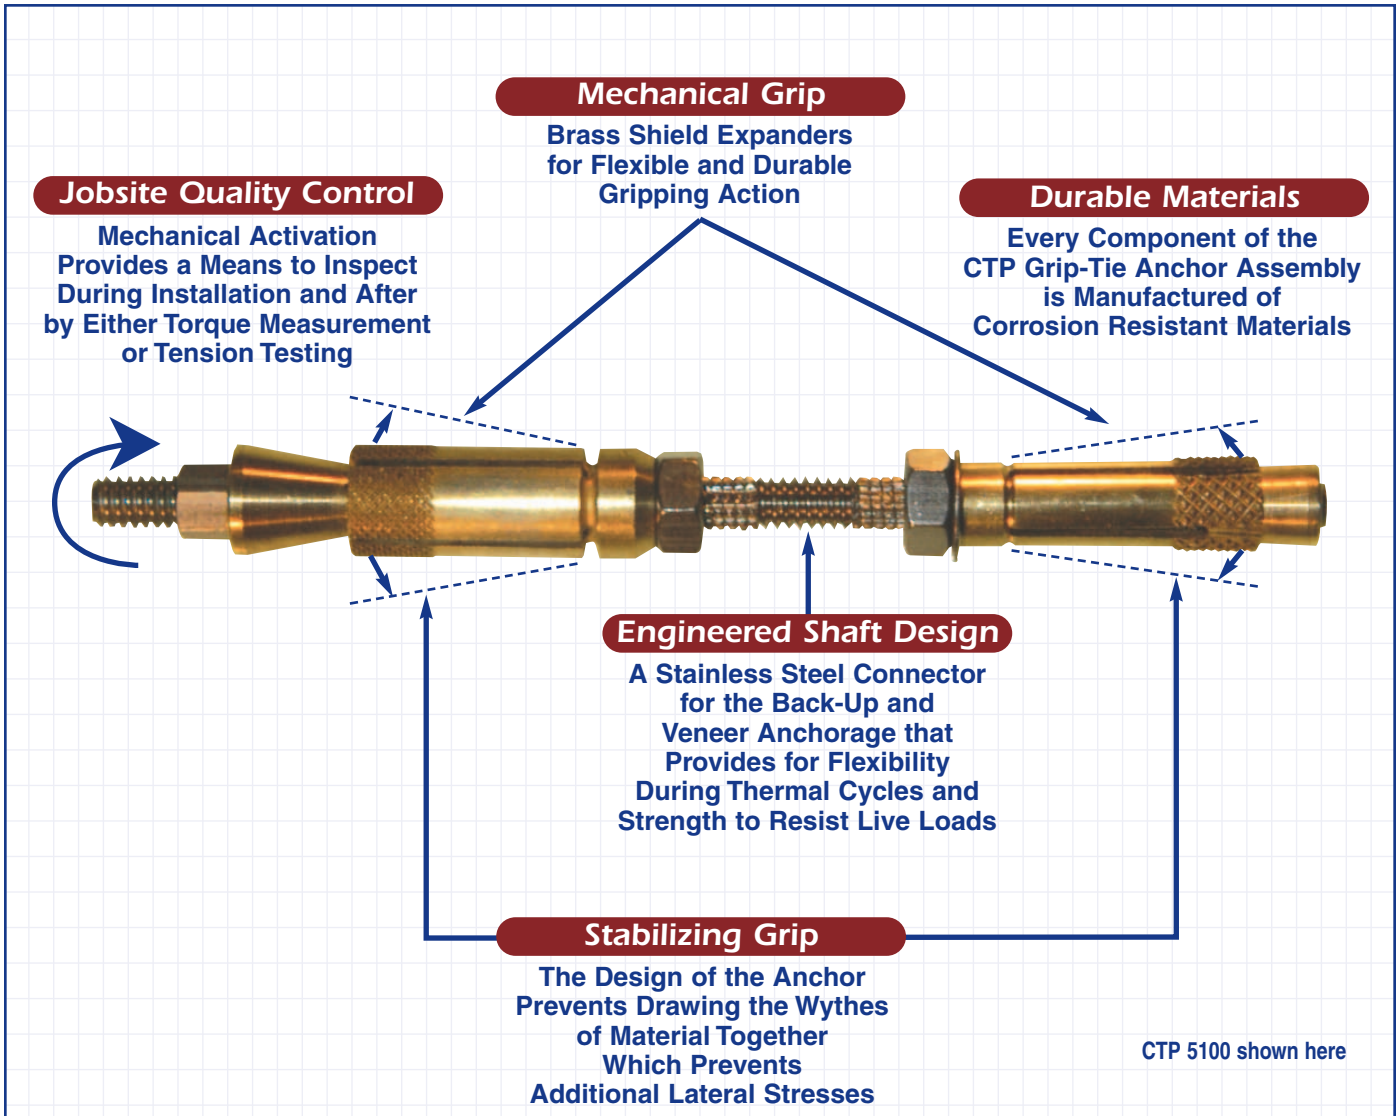


Typical Applications




Make It Strong Again!

- Brick Veneer Cavity Walls With:
- Insufficient Ties
 - Corroded Ties
 - Concrete Back-Up
 - Metal Stud Back-Up
 - Wind-Load Fortification




Multi-Tasked!

- Composite Walls Where Header Brick Have Failed
- Soft Brick or Mortar
- Deep Reaching Multi-Wythe Connections



Tough Problems Solved!







- Peripheral Areas Around Bulges in Walls or Areas to be Removed









We Make It Easy!

- Non-Brick Façades Such As:
- Limestone
 - Granite
 - Precast

CTP Grip-Tie Tension Capacities With Various Back-Up Material

Back-Up Material									CTP Anchor Series		
Ultimate Tension Capacity (lbs)											
METAL STUD		WOOD							BACK-UP		
16 Gauge	18 Gauge	2 x 4	4 x 4	1/2" Plywood	7/16" OSB	1" Sheathing					
835	500	900	1200	475	320	800		 CTP 5300R Series OR STEEL WOOD			
835	500	900	1200	475	320	800		 CTP 5300 Series OR STEEL WOOD			
LIGHT WEIGHT CMU	NORMAL WEIGHT CMU	CONCRETE	SOLID BRICK	CLAY TILE	STRUCTURAL STEEL	GROUTED CMU	SOFT BRICK	CINDER BLOCK	Typical CTP Grip-Tie Shaft Properties		
									Ultimate Shaft Buckling Strength		
									SHAFT LENGTH (in)	CAPACITY (lb)	
									5 1/2	1620	
									6 1/2	1425	
									9 1/2	1100	
									11 1/2	725	
Ultimate Tension Capacity (lbs)											
N/R	N/R	2000	1200	N/R	N/R	1200	800	N/R	 CTP 5000R Series SOLID MATERIAL 3/8" DRILL DIAMETER		
N/R	N/R	2300	1500	N/R	N/R	1600	1300	N/R	 CTP 5000 Series SOLID MATERIAL 1/2" DRILL DIAMETER		
1000	1100	1500	1200	700	2000 ≥ 5/16"	1100	800	500	 CTP 5100 Series CMU 3/8" DRILL DIAMETER		
N/R	N/R	N/R	N/R	750	2000 ≤ 5/16"	N/R	N/R	N/R	 CTP 5200 Series TILE 3/8" DRILL DIAMETER FOR TILE - or - 7/16" DRILL DIAMETER FOR STEEL OR STEEL		


CTP Grip-Tie Tension/Compression Capacities With Various Veneers

CTP Anchor Series			Veneer Material														
			Ultimate Tension Capacity (lbs)														
			MORTAR JOINT		BRICK		PRECAST		LIMESTONE		GRANITE						
			Soft	Hard	Soft	Hard											
TENSION	COMPRESSION	TENSION	COMPRESSION	TENSION	COMPRESSION	TENSION	COMPRESSION	TENSION	COMPRESSION	TENSION	COMPRESSION						
												VENEER		COMPRESSION			
←		→		←		→		←		→							
SET BACK 3/8" ~ 5/8"																	
3/8" Hole Site		CTP 5300R SERIES		900	800	1600	800	1200	1500	1500	1500	1500	1500	1500	1500	1200	
9/16" Hole Site		CTP 5300 SERIES				1600	1300	1500	1500	1700	1700	2000	1500	2000	1500	2000	1500
3/8" Hole Site		CTP 5000R SERIES		900	800	1600	800	1200	1500	1500	1500	1500	1500	1500	1200	1500	1200
1/2" Hole Site		CTP 5000 SERIES		900	800	1600	1300	1500	1500	1700	1700	2000	1500	2000	1200	2000	1200
1/2" Hole Site		CTP 5100 SERIES		900	800	1600	1300	1500	1500	1700	1700	2000	1500	2000	1200	2000	1200
1/2" Hole Site		CTP 5200 SERIES		900	800	1600	1300	1500	1500	1700	1700	2000	1500	2000	1200	2000	1200

Product Series of CTP Grip-Tie

CTP 5000 SERIES ANCHOR

INSTALLATION PROCEDURE AND CRITERIA FOR SOLID BACK-UP

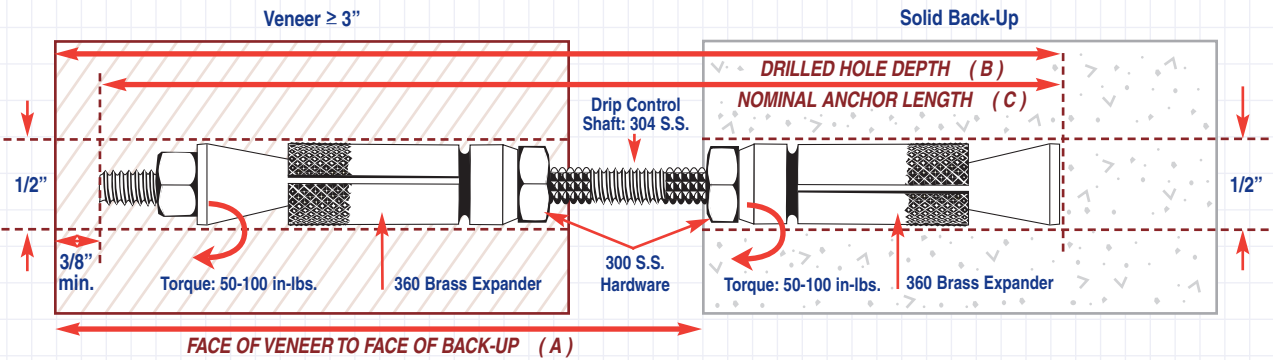


1. Select proper anchor length based on face of veneer to face of back-up (dimension A).
2. Drill appropriate hole at "TEE" joint location (no impact) to depth "B".
3. Blow out drill fines.
4. Assemble threaded portion of complete anchor assembly to the 501 setting tool.
(Hex bolt on tool MUST be seated) thread shaft into tool until it stops.
5. Insert entire assembly into drilled hole until it bottoms, tighten 50 – 100 in-lbs, remove setting tool.
(Loosen bolt head on tool while holding tool firmly, spin tool from anchor).
6. Slide socket and adaptor onto the square drive of the 501 Tool, and onto the 5/16 hex nut of the installed anchor, tighten 50-100 in-lbs.
7. Remove socket and plug hole.

CATALOG #	A	B	C
CTP-5054	4 – 5"	6	5 1/2"
CTP-5064	4 – 6"	7	6 1/2"
CTP-5074	4 – 7"	8	7 1/2"
CTP-5084	4 – 8"	9	8 1/2"
CTP-5084	4 – 8"	10	9 1/2"

OTHER LENGTHS AVAILABLE UPON REQUEST

CTP 5000R SERIES ANCHOR

INSTALLATION PROCEDURE AND CRITERIA FOR SOLID BACK-UP

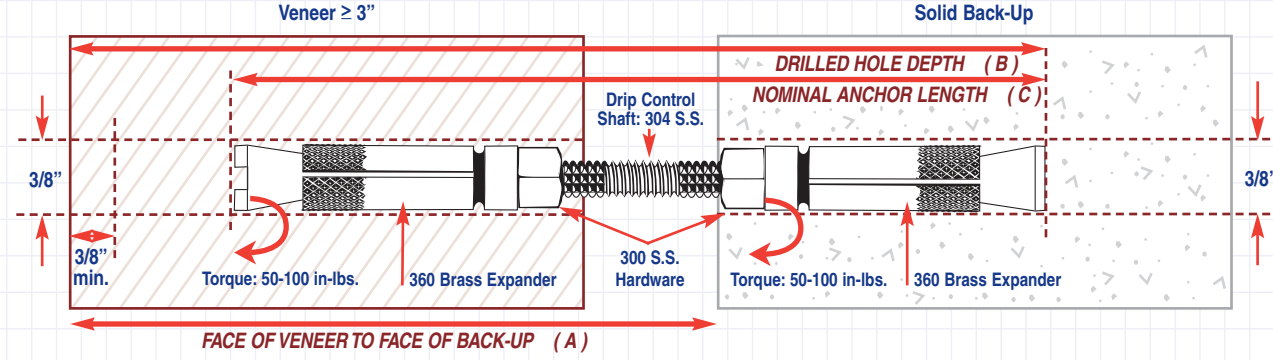

1. Select proper anchor length based on face of veneer to face of back-up (dimension A).
2. Drill appropriate hole through mortar joint (no impact) to depth illustrated (C).
3. Blow out drill fines.
4. Fit threaded shaft, with expander assembly opposite, to the 501R setting tool.
(Hex bolt on tool MUST be seated) thread shaft into tool until it stops;
Insert assembly into drilled hole until it bottoms; Tighten 50-100 in-lbs.
5. Remove tool by holding firmly and loosening the hex bolt, then spin tool off anchor shaft by hand.
6. Place outer brass shield over main body (slots facing outward) and slide over shaft until it stops against nut; Place slot of tapered cone onto the 501R tangs;
Position tapered cone onto shaft and tighten 50-100 in-lbs.
7. Remove tool, patch hole.


CATALOG #	A	B	C
CTP-5054R	4 – 6"	6 1/2"	6"
CTP-5064R	4 – 7"	7 1/2"	7"
CTP-5074R	4 – 8"	8 1/2"	8"
CTP-5084R	4 – 9"	9 1/2"	9"

OTHER LENGTHS AVAILABLE UPON REQUEST

Product Series of CTP Grip-Tie

CTP 5100 SERIES ANCHOR

INSTALLATION PROCEDURE AND CRITERIA FOR HOLLOW BACK-UP

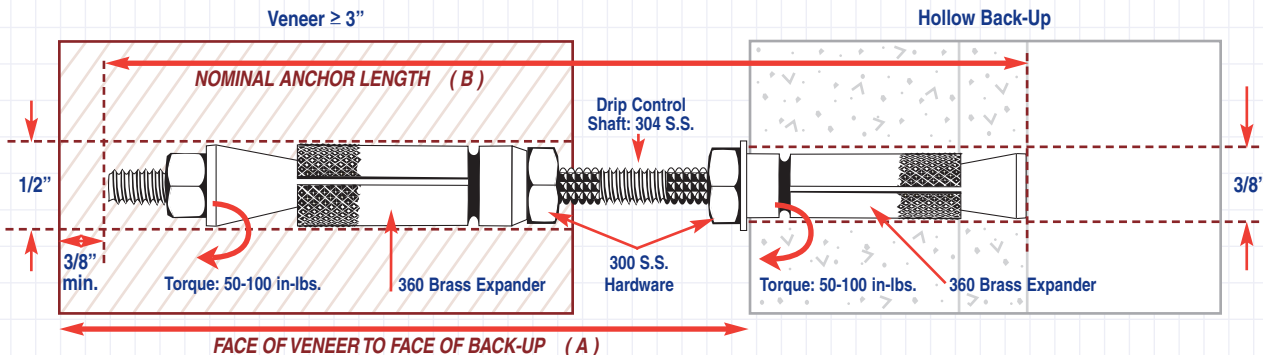


1. Select proper anchor length based on face of veneer to face of back-up (dimension A).
2. Drill 1/2" hole through "tee" joint (no impact) and a 3/8" hole in the back-up, at least 2" deep.
3. Blow out drill fines.
4. Assemble threaded portion of complete anchor assembly to the 501 setting tool.
(Hex bolt on the setting tool MUST be seated), thread shaft into setting tool until it stops;
Insert assembly into drilled hole until it bottoms; tighten 50 – 100 in-lbs.
5. Remove tool by holding firmly and loosening the hex bolt, then spin tool off anchor shaft by hand.
6. Slide socket drive and adaptor onto the square drive of the 501 tool and
on to the 5/16" nut of the installed anchor, tighten 50 – 100 in-lbs.
7. Remove socket, patch hole.

CATALOG #	A	B
CTP-5154	4 – 5"	5 1/2"
CTP-5164	5 – 6"	6 1/2"
CTP-5174	6 – 7"	7 1/2"
CTP-5184	7 – 8"	8 1/2"

OTHER LENGTHS AVAILABLE UPON REQUEST

CTP 5200 SERIES ANCHOR

INSTALLATION PROCEDURE AND CRITERIA FOR STEEL BACK-UP

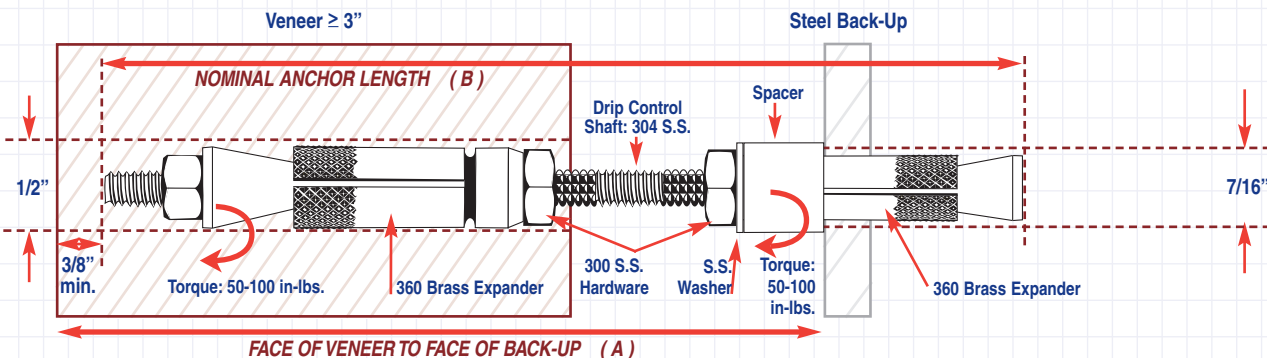

1. Select proper anchor length based on face of veneer to face of back-up (dimension A).
2. Drill 1/2" hole through mortar joint (no impact) and a 7/16" hole in the steel back-up.
3. Blow out drill fines.
4. Assemble threaded portion of complete anchor assembly to the 501 setting tool.
(Hex bolt on the setting tool MUST be seated), thread shaft into setting tool until it stops;
Insert assembly into drilled hole until it bottoms; tighten 50 – 100 in-lbs.
5. Remove tool by holding firmly and loosening the hex bolt, then spin tool off anchor shaft by hand.
6. Slide socket drive and adaptor onto the square drive of the 501 tool and
on to the 5/16" nut of the installed anchor, tighten 50 – 100 in-lbs.
7. Remove socket, patch hole.


CATALOG #	A	B
CTP-5254	4 1/2 – 5 1/2"	5 1/2"
CTP-5264	5 1/2 – 6 1/2"	6 1/2"
CTP-5274	6 1/2 – 7 1/2"	7 1/2"
CTP-5284	7 1/2 – 8 1/2"	8 1/2"

OTHER LENGTHS AVAILABLE UPON REQUEST

Product Series of CTP Grip-Tie

CTP 5300 SERIES ANCHOR

INSTALLATION PROCEDURE AND CRITERIA FOR STUD BACK-UP

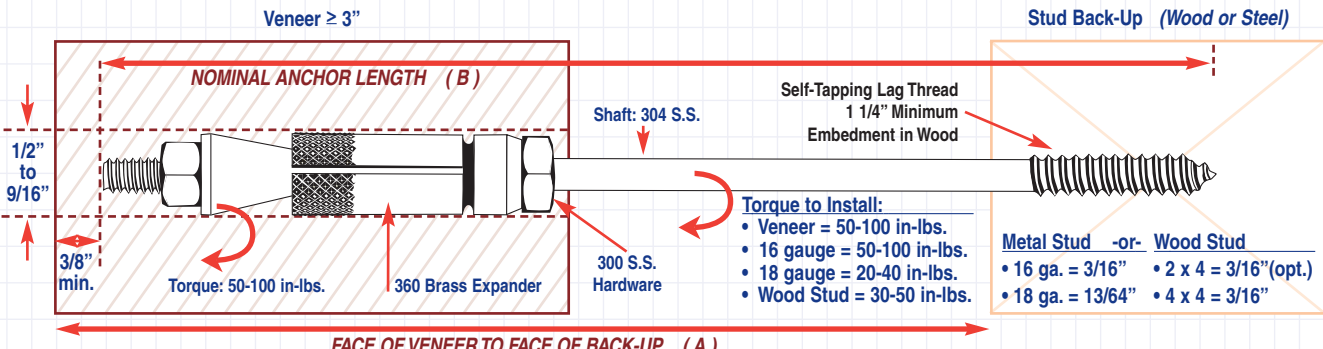


1. Select proper anchor length based on face of veneer to face of back-up (dimension A).
2. Drill appropriate hole in mortar joint at stud location using a rotary hammer or hammer drill. Rotary only in soft material.
3. Drill 9/16" hole through outer wythe of material.
 - For metal stud, a 5/32" pilot hole is needed for 18, 20 and 22 gauge stud, a pilot hole of 3/16" for 16 gauge and greater is required.
 - For wood stud back-up, a pilot may not be needed, 3/16" if necessary.
4. Blow out excess drill fines.
5. Assemble threaded portion of complete anchor assembly to the setting tool. (Hex bolt on the setting tool must be fully seated) thread anchor shaft into setting tool until it stops.
6. Insert entire assembly into drilled hole until the pointed end of the shaft makes contact with the stud, firmly thread by hand in drilled hole back-up.
7. Rotate tool clockwise and tighten back-up anchor in metal stud 20 - 50 in-lb. (50 - 100 in-lb. in 16 ga. and wood stud) remove setting tool.
8. To remove setting tool, loosen bolt head while holding setting tool firmly, spin off by hand.
9. Slide socket drive tool over hex segment of setting tool on the hex nut of the anchor and tighten to 50 - 100 in-lb.
10. Remove socket and plug hole.

CATALOG #	A	B
CTP-5354	4 - 5"	5 1/2"
CTP-5364	5 - 6"	6 1/2"
CTP-5374	6 - 7"	7 1/2"
CTP-5384	7 - 8"	8 1/2"

OTHER LENGTHS AVAILABLE UPON REQUEST

CTP 5300R SERIES ANCHOR

INSTALLATION PROCEDURE AND CRITERIA FOR STUD BACK-UP

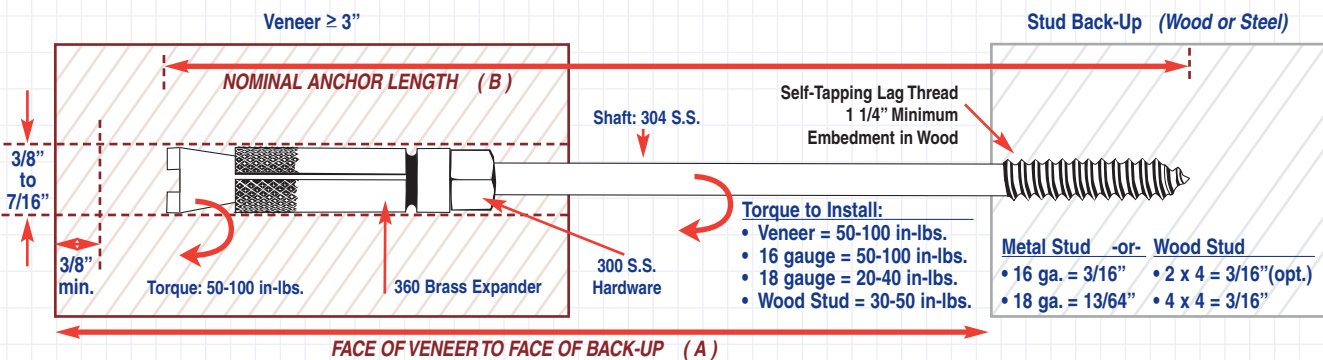

1. Select proper anchor length based on face of veneer to face of back-up (dimension A).
2. Drill appropriate hole in mortar joint at stud location using a rotary hammer or hammer drill. Rotary only in soft material.
3. Drill 3/8" hole through outer wythe of material.
 - For metal stud, a 5/32" pilot hole is needed for 18, 20 and 22 gauge stud, a pilot hole of 3/16" for 16 gauge and greater is required.
 - For wood stud back-up, a pilot may not be needed, 3/16" if necessary.
4. Blow out excess drill fines.
5. Assemble threaded portion of anchor shaft to the 501R setting tool. (Hex bolt on the setting tool must be fully seated) thread anchor shaft into setting tool until it stops.
6. Insert entire assembly into drilled hole until the pointed end of the shaft makes contact with the stud, firmly thread by hand in drilled hole back-up.
7. Rotate tool clockwise and tighten back-up anchor in metal stud 20 - 50 in-lb. (50 - 100 in-lb. in 16 ga. and wood stud) remove setting tool.
8. To remove setting tool, loosen bolt head while holding setting tool firmly, spin off by hand.
9. Place outer brass shield over main body (slots facing outward) and slide over shaft until it stops against nut. Place slot of tapered cone onto the 501R tangs; Position tapered cone onto shaft and tighten 50-100 in-lbs.
10. Remove tool, patch hole.

CATALOG #	A	B
CTP-5344R	4 - 5"	4 1/2"
CTP-5354R	5 - 6"	5 1/2"
CTP-5364R	6 - 7"	6 1/2"
CTP-5374R	7 - 8"	7 1/2"

OTHER LENGTHS AVAILABLE UPON REQUEST

PART 1 GENERAL

- 1.1 SECTION INCLUDES
 - A. Masonry repair systems
- 1.2 RELATED SECTIONS
 - A. Section 04900 – Masonry Restoration and Cleaning:
Coordination and installation requirements.
- 1.3 REFERENCES
 - A. ACI 530.1/ASCE 6/TMS – Specifications for Masonry Structures
 - B. American Society for Testing and Materials (ASTM) B 16, Type 360 Brass
 - C. ASTM – 580A, Type 304 S.S.
 - D. BIA TEK NOTE 46
- 1.4 SUBMITTALS
 - A. Submit under provisions of Section 01300
 - B. CTP Grip-Tie: manufacturers data sheets on each product to be used, including:
 - 1. Preparation instructions and recommendations.
 - 2. Storage and handling requirements and recommendations.
 - 3. Installation methods
- 1.5 DELIVERY, STORAGE AND HANDLING
 - A. Store products in manufacturer's unopened packaging until ready for installation.

PART 2 PRODUCTS

- 2.1 MANUFACTURER
 - A. Acceptable Manufacturer:
Construction Tie Products, Inc. (CTP, Inc.),
Michigan City, IN, 46360-9390 USA.
Tel: 219-878-1427 Fax: 219-874-3626
salesctp@comcast.net
- 2.2 PRODUCTS
 - A. Masonry Repair and Restoration Re-Anchoring Existing Veneers
(Selection based on application):
 - 1. Application: Masonry Veneer to Solid Back-up.
 - a. 5000 Series CTP Grip-Tie Mechanical Repair Anchor
 - b. 5000R Series CTP Grip-Tie Mechanical Repair Anchor
 - 2. Application: Masonry Veneer to Hollow Back-up.
 - a. 5100 Series CTP Grip-Tie Mechanical Repair Anchor
 - 3. Application: Masonry Veneer to Structural Steel Back-up.
 - a. 5200 Series CTP Grip-Tie Mechanical Repair Anchor
 - 4. Application: Masonry Veneer to Timber/Steel Stud Back-up.
 - a. 5300 Series CTP Grip-Tie Mechanical Repair Anchor
 - b. 5300R Series CTP Grip-Tie Mechanical Repair Anchor

PART 3 EXECUTION

- 3.1 PREPARATION
 - A. Locate anchors in the area to be anchored per project drawings and details.
- 3.2 INSTALLATION
 - A. Select proper anchor length by field verification.
 - B. Drill proper hole size per anchor type and blow out drill fines.
 - C. Using appropriate setting tool and adapters, tighten back-up anchor to recommended torque range, then tighten facade portion to the recommended torque range.
 - D. Conceal anchor with specified grout or caulk.



CTP Grip-Tie Planning Guide

SPECIAL DUAL DIAMETER DRILL BITS

8" and 14" Dual Diameter Drill Bits for CTP 5100 Series

SETTING TOOLS

For: CTP 5000 • CTP 5100 • CTP 5100S • CTP 5300 Series

CTP 502 Adapter
CTP 503 5/16" Deep Well Socket
CTP 501 Setting Tool

For: CTP 5300R

CTP 501R Setting Tool

Warranty

Seller makes no warranty of any kind, expressed or implied, except that the goods sold under this agreement shall be of the standard quality of the seller, and buyer assumes all risk and liability resulting from the use of the goods, whether used singly or in combination with other goods. Seller neither assumes nor authorizes any person to assume for seller any other liability in conjunction with the sale or use of the goods sold, and there is no oral agreement or warranty collateral to or affecting this transaction.

Warning

The information contained in this publication does not constitute any professional opinion or judgement and should not be used as a substitute for competent professional determinations. Each construction project is unique and the appropriate use of this product is the responsibility of the engineers, architects, and other professionals who are familiar with the specific requirements of the project.



CONSTRUCTION TIE PRODUCTS

7974 W. Orchard Drive
Michigan City, Indiana 46360-9390 • USA
Phone: (219) 878-1427 • Fax: (219) 874-3626
www.ctpanchors.com

Engineered Anchoring Solutions Provider

Approval