



CTP STONE-GRIP TIE


-- Submittal --



CTP 6100-1 SERIES ANCHOR

Requires 3/4" Socket and CTP 501 Setting Tool

Type 1 : Wind load restraint for one direction loading to hollow and solid back-up.

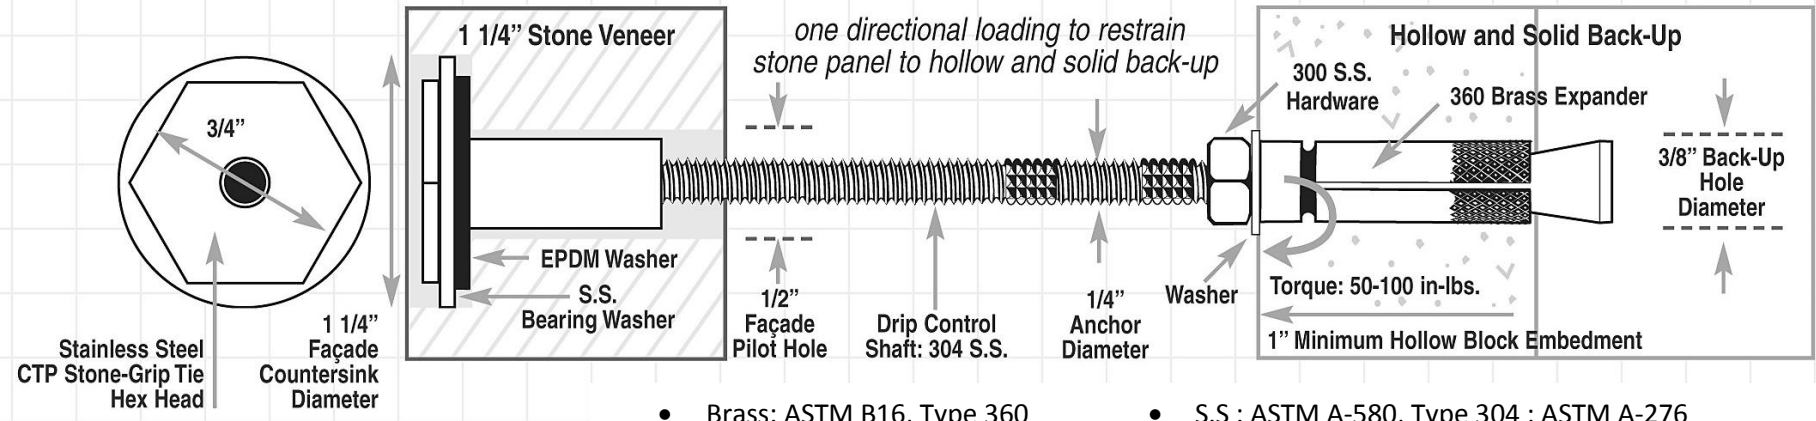

<u>Length</u>			<u>Head Style</u>	
<input type="checkbox"/> 5½ " (138mm)	<input type="checkbox"/> 7½ " (188mm)	<input type="checkbox"/> 9½ " (238mm)	<input type="checkbox"/> Hex (as shown)	<input type="checkbox"/> Round _____ Diameter
<input type="checkbox"/> 6½ " (163mm)	<input type="checkbox"/> 8½ " (213mm)	<input type="checkbox"/> Other	Other _____	
			Color _____	
			<input type="checkbox"/> Standard <input type="checkbox"/> Polished <input type="checkbox"/> Powder coat <input type="checkbox"/> Bead Blast	
			Other _____	

Project: _____

Submitted By: _____ Date: _____

7974 W. Orchard Dr. * Michigan City, IN 46360 * Phone:(219)878-1427*Fax: (219)874-3626

Email: steve@ctpanchors.com * www.ctpanchors.com