



# CTP STONE-GRIP TIE




-- Submittal --

## CTP 6200-1 SERIES ANCHOR

Requires 3/4" Socket and CTP 501 Setting Tool

*Type 1 : Wind load restraint for one direction loading to structural steel back-up.*

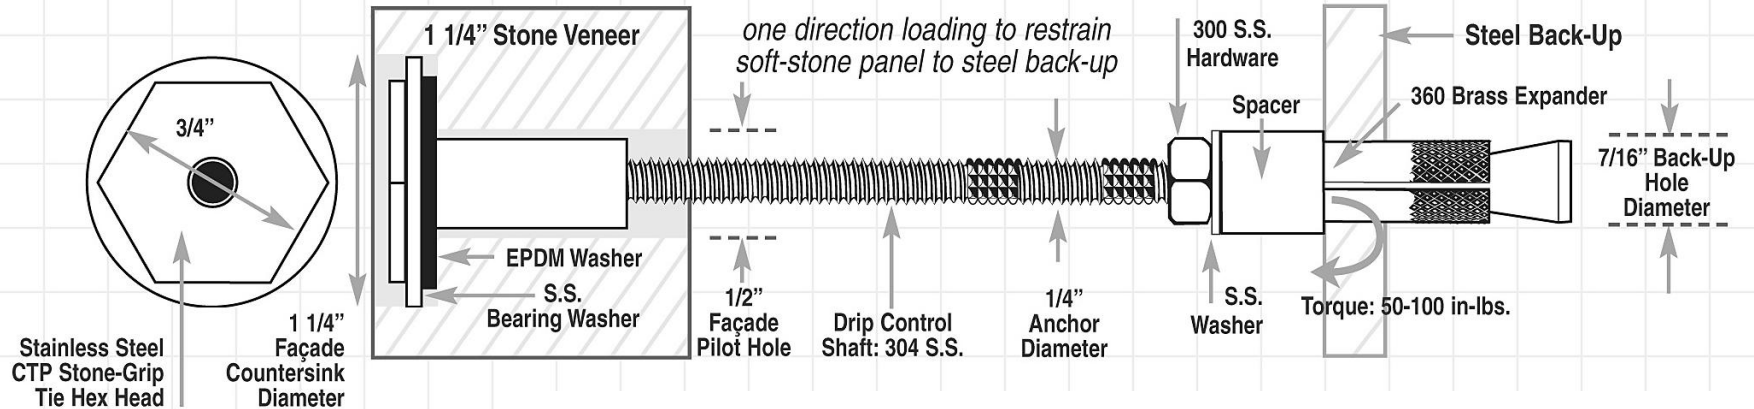

• Brass: ASTM B16, Type 360

• S.S : ASTM A-580, Type 304 ; ASTM A-276

### Length

- |  |  |  |
|--|--|--|
| <input type="checkbox"/> 5 1/2 " (138mm) | <input type="checkbox"/> 7 1/2 " (188mm) | <input type="checkbox"/> 9 1/2 " (238mm) |
| <input type="checkbox"/> 6 1/2 " (163mm) | <input type="checkbox"/> 8 1/2 " (213mm) | <input type="checkbox"/> Other           |

### Head Style

- Hex (as shown)     Round \_\_\_\_\_ Diameter
- Other \_\_\_\_\_
- Color** \_\_\_\_\_
- Standard     Polished     Powder coat     Bead Blast
- Other \_\_\_\_\_

Project: \_\_\_\_\_

Submitted By: \_\_\_\_\_ Date: \_\_\_\_\_

7974 W. Orchard Dr. \* Michigan City, IN 46360 \* Phone:(219)878-1427\*Fax: (219)874-3626

Email: [steve@ctpanchors.com](mailto:steve@ctpanchors.com) \* [www.ctpanchors.com](http://www.ctpanchors.com)