



CTP STONE-GRIP TIE


-- Submittal --



CTP 6300-1 SERIES ANCHOR

Requires 3/4" Socket and CTP 501 Setting Tool

Type 1 : Wind load restraint for uni-directional loading to wood or steel stud back-up.

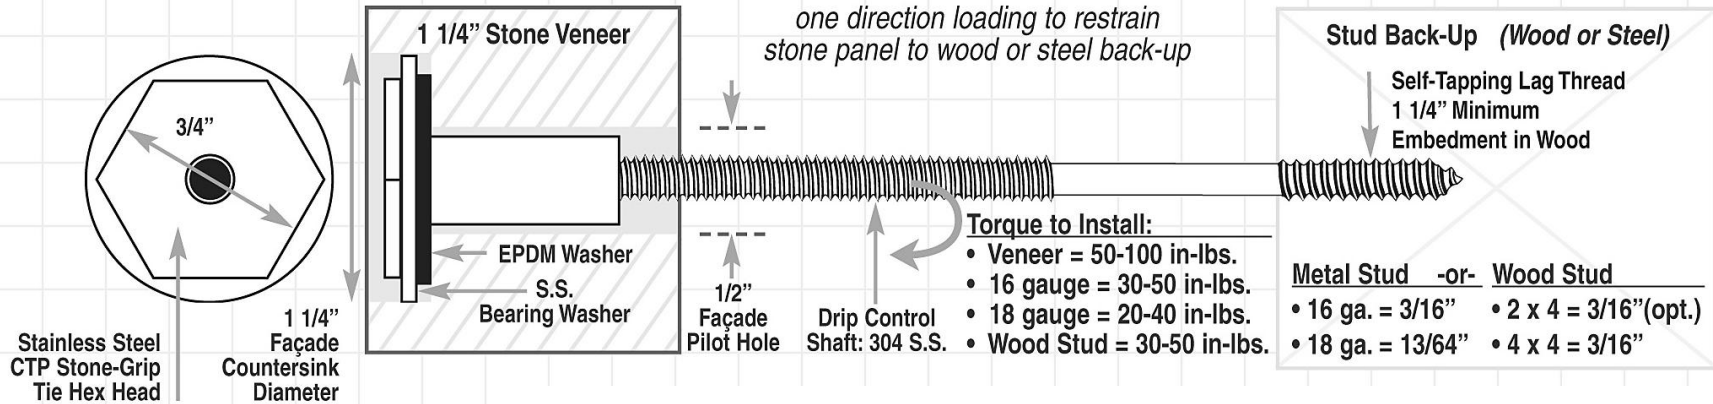

- S.S : ASTM A-580, Type 304 ; ASTM A-276

<u>Length</u>			<u>Head Style</u>	
<input type="checkbox"/> 5 1/2 " (138mm)	<input type="checkbox"/> 7 1/2 " (188mm)	<input type="checkbox"/> 9 1/2 " (238mm)	<input type="checkbox"/> Hex (as shown)	<input type="checkbox"/> Round _____ Diameter
<input type="checkbox"/> 6 1/2 " (163mm)	<input type="checkbox"/> 8 1/2 " (213mm)	<input type="checkbox"/> Other	Other _____	
			Color _____	
			<input type="checkbox"/> Standard <input type="checkbox"/> Polished <input type="checkbox"/> Powder coat <input type="checkbox"/> Bead Blast	
			Other _____	

Project: _____

Submitted By: _____ Date: _____

7974 W. Orchard Dr. * Michigan City, IN 46360 * Phone:(219)878-1427*Fax: (219)874-3626

Email: steve@ctpanchors.com * www.ctpanchors.com