


**CTP-16 Base Plate:** Mark Finish (x); Plate Size (x); Tie Length (x); Tie Finish (x)

1

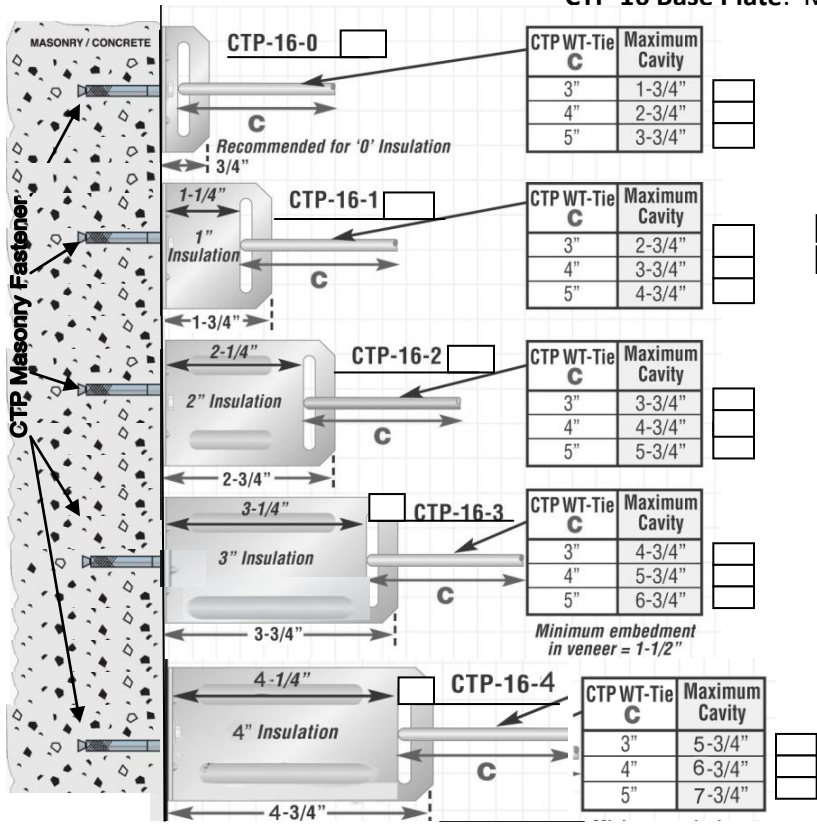


1"(25mm)x2" (50mm)  
 16 gauge(1.5mm) Carbon Steel ASTM A 1008  
 Hot Dipped Galvanized (H.D.G) per ASTM A153, C1, B2  
 Stainless Steel (S.S) Type 304 per ASTM 167

**Wall Tie** The CTP WT-Tie is a multifunctional triangle wall tie that can be used in Standard or Seismic Anchoring Applications Finished in Hot Dip Galvanized Steel or Stainless Steel

The CTP WT-Tie is a Multifunctional Triangle Wall Tie

2

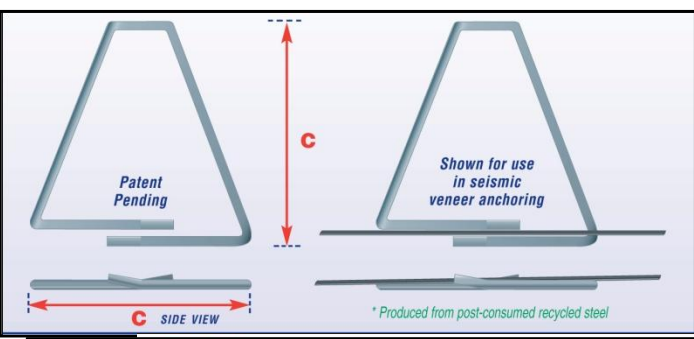

**Material:**


- 3/16" (4.76mm) Diameter Wire
- Carbon Steel per ASTM A 82
- Stainless Steel (S.S) Type 304 per ASTM A580

**Finish:**

- Hot Dipped Galvanized (H.D.G) per ASTM A153, C1, B2, 1.50 oz/f1<sup>2</sup> min.
- Stainless Steel – Clean and Dry

C	H.D.G.	S.S.
3"	CTP WT-32	CTP WT-35
4"	CTP WT-42	CTP WT-45
5"	CTP WT-52	CTP WT-55

**CTP MASONRY FASTENER**

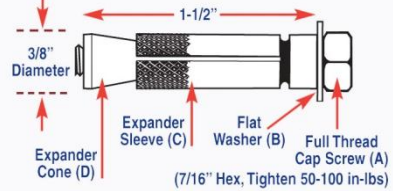

Catalog #	A	B	C	D	Submit
CTP-561022 ZINC PLATED HARDWARE	ZINC PLATED, A307 ASME B18.2.1	ZINC PLATED ANSI B18.22.1TYA	ASTM A-360 Brass	ASTM A-360 Brass	
CTP-541022 STAINLESS STEEL HARDWARE	300 SERIES STAINLESS STEEL ASME B18.2.1	ANSI B18.22.1TYA	ASTM A-360 Brass	ASTM A-360 Brass	

3

Project: \_\_\_\_\_

Submitted By: \_\_\_\_\_

Date: \_\_\_\_\_

7974 W. Orchard Dr. \* Michigan City, IN 46360 \* Phone:(219)878-1427 \* Fax: (219)874-3626

Email: [steve@ctpanchors.com](mailto:steve@ctpanchors.com) \* [www.ctpanchors.com](http://www.ctpanchors.com)